

indicator

PWR

ENDA

Read this document carefully before using this device. The guarantee will be expired by damaging of the device if you don't attend to the directions in the user manual. Also we don't accept any compensations for personal injury, material damage or capital disadvantages.

## ENDA ATS4 ANALOG TIMER

Thank you for choosing ENDA ATS4 analog timer.



3

1S2....0 .. 1.2 seconds

3S.....0 .. 3 seconds

12S 0 12 seconds 30S.....0 .. 30 seconds

60S.....0 .. 60 seconds

3M.....0 .. 3 minutes

12H.....0 .. 12 hours

12M....0 .. 12 minutes 30M....0 .. 30 minutes 60M....0 .. 60 minutes 3H.....0..3 hours

3 - Time Ranges

Control output Power

state indicator

OUT

ATS4

- \* 48\*48mm sized.
- \* Start by supply voltage.
- \* Control output for timing funciton (A mode) with on-delay operation (OUT).
- \* 8 pin octal connector or screw-terminal connection. \* CE marked according to European Norms.

Order Code : ATS4-

- 1 Connection Type K.....Screw Terminal None...Octal Connector
- 2 Supply Voltage 230VAC...230V AC 24.....24V AC/DC

## **Connection Diagram**


SEC

Time setting knob



ENDA ATS4 is intended for installation in control panels. Make sure that the device is used only for intended purpose. The electrical connections must be carried on by a gualified staff and must be according to the relevant locally applicable regulations. During an installation, all of the cables that are connected to the device must be free of energy. The device must be protected against inadmissible humidity, vibrations, severe soiling and make sure that the operation temperature is not exceeded. All input and output lines that are not connected to the supply network must be laid out as shielded and twisted cables. These cables should not be close to the power cables or components. The shielding must be grounded on the instrument side.


ENDA INDUSTRIAL ELECTRONICS ROHS	ENDA INDUSTRIAL ELECTRONICS ROHS
CONTACT 250V AC 3A RESISTIVE LOAD SN: XXXXXXXXXX SN: XXXXXXXXXX 200 300 300 300 300 300 300 300	CONTACT 250V AC 3A RESISTIVE LOAD SN: XXXXXXXXX SSUPLY 20 C SN: XXXXXXXXX 20 C SUPLY 20 ACDA SUPPLY 20 ACDA SUPPLY 20 ACDA SUPPLY 20 ACDA SUPLY 20 ACDA SUPL



- NOTE : SUPPLY: Fuse Switch F 100 mA 250V AC 184-253V AC 2 230V AC 50/60Hz 7VA (7) Supply Fuse should Cable size: 1.5mm<sup>2</sup> be connected
- NOTE:1) Mains supply cords shall meet the requirements of IEC 60799 or IEC 60245. 2) In accordance with the safety regulations, the power supply switch shall bring the identification of the relevant instrument and It should be easily accessible by the operator.

## **Technical Specifications**

Ambient/storage temperatu	10 1 ±50°C/-25 70°C	
Max. relative humidity	80%, up to 31°C decreasing linearly 50% at 40°C	
Rated pollution degree	According to EN 60529 Front panel : IP50 Rear panel : IP20	
Height	Maximum 2000m	
Do not use the dev	ice in locations subject to corrosive and flammable gasses.	
ELECTRICAL CHARAC	TERISTICS	
Supply voltage	230V AC +10% -20%, 50/60Hz or 24V AC/DC ±10%, 50/60Hz	
Power consumption	laximum 7VA	
Connection	-pins octal connector or 2.5mm <sup>2</sup> screw-terminal connections.	
Scale	.2, 3, 12, 30, 60 seconds; 3, 12, 30, 60 minutes; 3, 12 hours.	
Reset time	Max. 0.5 seconds	
Accuracy	±10% (of full scale)	
EMC	EN 61326-1: 1997, A1: 1998, A2: 2001 (Performance criterion B is satisfied for EMC tests.)	
Safety requirements	EN 61010-1: 2001 (Pollution degree 2, overvoltage category II)	
OUTPUTS		
Control output (OUT)	Relay: 250V AC, 3A (for resistive load), NO+NC	
Life expectancy for relay	Mechanical 30.000.000 operation; electrical 300.000 operation	
Control output state	While control output is energized, OUT LED is on.	
CONTROL		
Timing function	Power on-delay operation (A mode).	
Start	By supply voltage.	
Reset	Time resets when supply voltage goes off.	
HOUSING		
Housing type	Suitable for flush-panel mounting.	
Dimensions	W48xH48xD82mm	
Weight	Approx. 90g (after packing)	
Enclosure material	Self extinguishing plastics.	

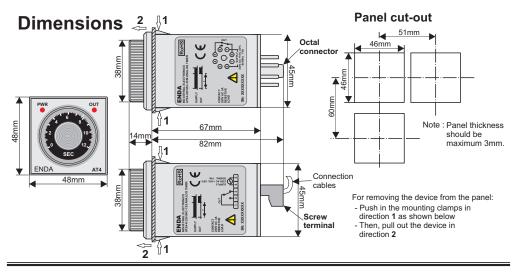

SİSEL MÜHENDİSLİK ELEKTRONİK SAN. VE TİC. A.Ş. Yukarı Dudullu Barbaros Cad. Kutup Sok. No:20 34775 - ÜMRANİYE/İSTANBUL/TÜRKİYE Tel: +90 216 499 46 64 Pbx. Fax: +90 216 365 74 01 url:www.enda.com.tr 2/2